



ZCAL0204全系列参数对照表

Dimensions

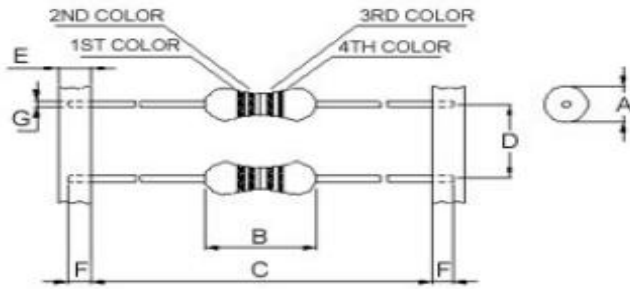

UNIT: mm

- A 2.8^{+0}
- B 4^{+0}
- C 52.4 ± 1.5
- D 5 ± 0.5
- E 6 ± 1
- F 3.2^{+0}
- G 0.5ϕ

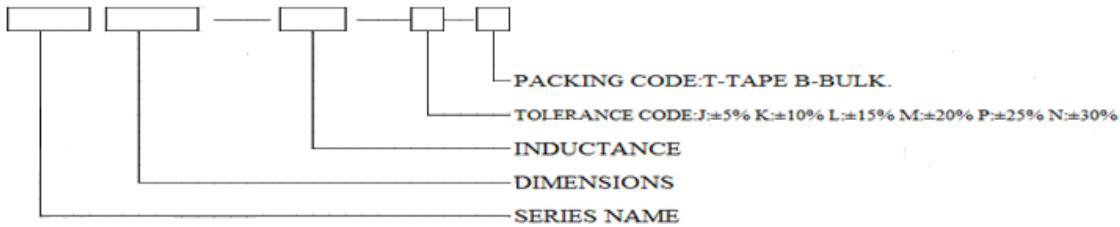


Part Number	Inductance	Test Frequency	Standard Specification		
			DC Resistance Max	Q	IDC
Units	uH	MHz	Ω	Min	(mA)
ZCAL0204-R22	0.22	25.20	0.40	35	400
ZCAL0204-R33	0.33	25.20	0.48	35	370
ZCAL0204-R47	0.47	25.20	0.56	35	330
ZCAL0204-R56	0.56	25.20	0.61	35	320
ZCAL0204-R68	0.68	25.20	0.67	35	310
ZCAL0204-R82	0.82	25.20	0.74	35	290
ZCAL0204-1R0	1.00	25.20	0.80	35	270
ZCAL0204-2R2	2.20	7.96	1.2	40	230
ZCAL0204-3R3	3.30	7.96	1.4	40	210
ZCAL0204-4R7	4.70	7.96	1.7	40	190
ZCAL0204-6R8	6.80	7.96	2.0	40	175
ZCAL0204-100	10	7.96	2.5	40	160
ZCAL0204-150	15	2.52	2.8	40	145
ZCAL0204-220	22	2.52	3.4	40	130
ZCAL0204-330	33	2.52	4.7	40	76
ZCAL0204-470	47	2.52	5.8	40	70
ZCAL0204-560	56	2.52	6.4	40	68
ZCAL0204-680	68	2.52	7.2	40	64
ZCAL0204-820	82	2.52	11	40	46
ZCAL0204-101	100	2.52	12	40	44
ZCAL0204-151	150	0.796	16	40	39
ZCAL0204-181	180	0.796	18	40	37
ZCAL0204-221	220	0.796	20	40	35

Tolerance: J = $\pm 5\%$, K = $\pm 10\%$, M = $\pm 20\%$


ZCAL0307全系列参数对照表

Dimensions

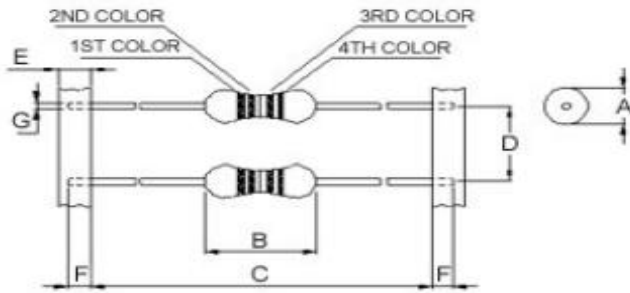

UNIT: mm

- A 3⁺⁰
- B 7⁺⁰
- C 52.4 ± 1.5
- D 5 ± 0.5
- E 6 ± 1
- F 3.2⁺⁰
- G 0.5φ

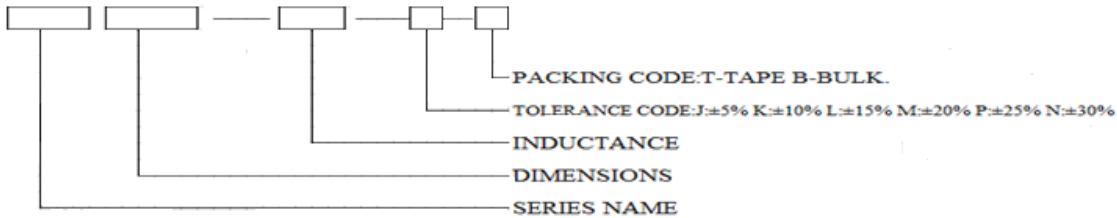


Part Number	Inductance	Test Frequency	Standard Specification		
			DC Resistance Max	Q	IDC
Units	uH	MHz	Ω	Min	(mA)
ZCAL0307-R22	0.22	25.20	0.20	45	400
ZCAL0307-R33	0.33	25.20	0.24	45	370
ZCAL0307-R47	0.47	25.20	0.28	45	330
ZCAL0307-R56	0.56	25.20	0.31	50	320
ZCAL0307-R68	0.68	25.20	0.34	50	310
ZCAL0307-R82	0.82	25.20	0.37	55	290
ZCAL0307-1R0	1.00	25.20	0.40	60	270
ZCAL0307-2R2	2.20	7.96	0.25	50	630
ZCAL0307-3R3	3.30	7.96	0.30	50	575
ZCAL0307-4R7	4.70	7.96	0.35	45	530
ZCAL0307-6R8	6.80	7.96	0.45	40	470
ZCAL0307-100	10	7.96	0.72	40	370
ZCAL0307-150	15	2.52	0.88	50	335
ZCAL0307-220	22	2.52	1.20	50	285
ZCAL0307-330	33	2.52	1.50	50	255
ZCAL0307-470	47	2.52	2.30	60	205
ZCAL0307-560	56	2.52	2.60	60	195
ZCAL0307-680	68	2.52	2.90	60	185
ZCAL0307-101	100	2.52	3.50	60	165
ZCAL0307-151	150	0.796	4.40	60	150
ZCAL0307-221	220	0.796	5.70	60	130
ZCAL0307-681	680	0.796	18.00	60	75
ZCAL0307-102	1000	0.796	26.00	60	60

Tolerance: J = ±5%, K = ±10%, M = ± 20%

ZCAL0410全系列参数对照表

Dimensions

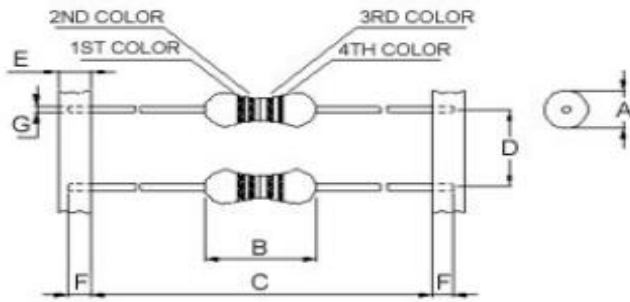

UNIT: mm

A 4⁺⁰

B 10.5⁺⁰


C 52.4 ± 1.5

D 5 ± 0.5

E 6 ± 1

F 3.2⁺⁰

G 0.65 ϕ

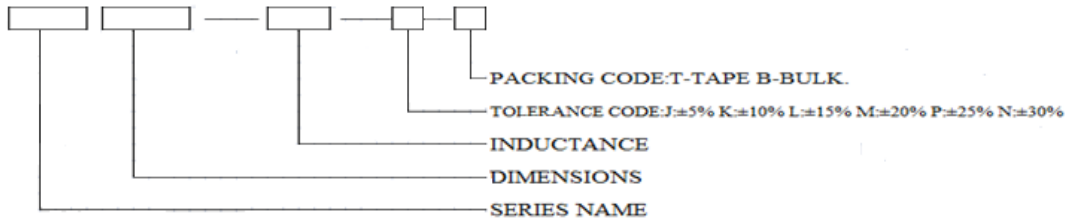

Part Number	Inductance	Test Frequency	Standard Specification		
			DC Resistance Max	Q	IDC
Units	uH	MHz	Ω	Min	(mA)
ZCAL0410-R22	0.22	25.20	0.21	25	880
ZCAL0410-R33	0.33	25.20	0.28	25	750
ZCAL0410-R47	0.47	25.20	0.36	25	650
ZCAL0410-R56	0.56	25.20	0.41	25	600
ZCAL0410-R68	0.68	25.20	0.47	25	550
ZCAL0410-R82	0.82	25.20	0.17	45	980
ZCAL0410-1R0	1.00	25.20	0.19	45	920
ZCAL0410-2R2	2.20	7.96	0.28	55	750
ZCAL0410-3R3	3.30	7.96	0.34	65	670
ZCAL0410-4R7	4.70	7.96	0.39	70	620
ZCAL0410-6R8	6.80	7.96	0.48	75	550
ZCAL0410-100	10	7.96	0.58	85	500
ZCAL0410-150	15	2.52	0.72	70	460
ZCAL0410-220	22	2.52	0.84	60	410
ZCAL0410-330	33	2.52	1.03	55	370
ZCAL0410-470	47	2.52	1.22	45	340
ZCAL0410-560	56	2.52	1.34	40	320
ZCAL0410-680	68	2.52	1.47	40	305
ZCAL0410-101	100	2.52	1.80	30	275
ZCAL0410-151	150	0.796	4.20	70	175
ZCAL0410-221	220	0.796	5.10	70	155
ZCAL0410-331	330	0.796	6.40	65	137
ZCAL0410-391	390	0.796	7.00	65	133

Tolerance: K = ±10%, M = ± 20%

